


Three Phase Motor FWR/REV S.S.R.

■ Product Characteristics

- ◆ It can replace electro-magnetic switch or frequency changer to perform clockwise and counterclockwise rotation control.
- ◆ No connection, no sparks, smooth face wearing, long-life, more secure in the factory.
- ◆ Multi-lock protection of internal key, ON/OFF times can be 60 times/min.
- ◆ Highest capacity can be 480V 3KW.

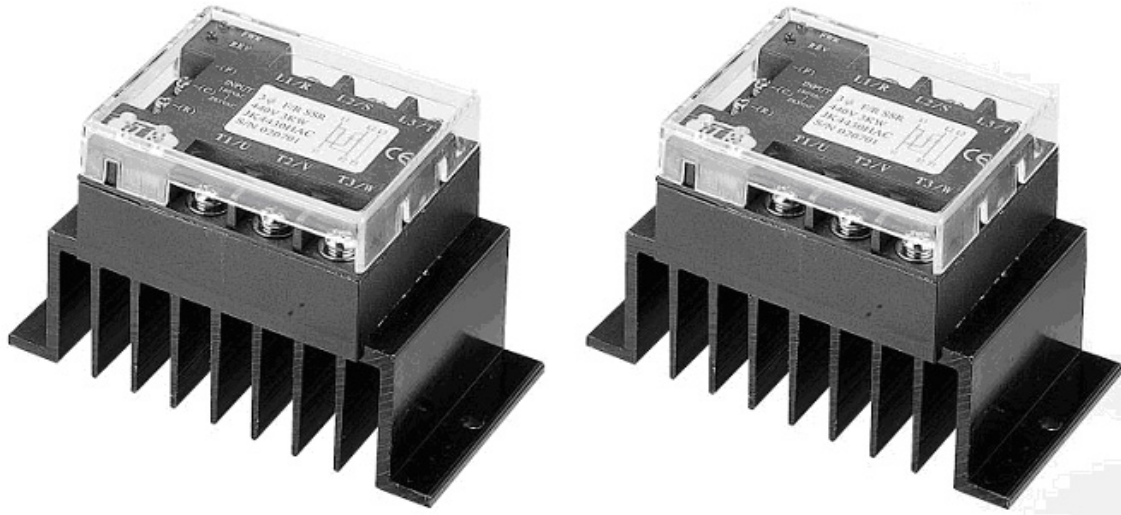

Three Phase Motor FWR/REV S.S.R.

>>> Choice of Specification & Models

Work Voltage	Control Voltage	Load 0.5KW	Load 1KW	Load 1.5KW	Load 3KW
220V	10 ~ 32VDC	JK2205HDC	JK2210DC	JK2215DC	
	180 ~ 265VAC	JK2205HAC	JK2210HAC	JK2215HAC	
380/440V	10 ~ 32VDC	JK4405HDC		JK4415HDC	JK4430HDC
	180 ~ 265VAC	JK4405HAC		JK4415HAC	JK4430HAC

Remark:

Isolation Resistance: Over 20MΩ (Power & External Cover)

Over 20MΩ (Input Signal & External Cover)

Strength of Press-Resisted: 2500VAC/1 Min. between power & External cover

1000VAC/1 Min. between power & Input Signal